

May 8, 2019

Via Internet Posting (3 pages)

**Addendum No. 3  
Tender 137-2019****REVISED Closing: 12:00 NOON (LOCAL TIME), May 14th, 2019****For: Trace Manes Park Playground and Waterplay Upgrades, on behalf of the  
Parks, Forestry and Recreation Division of the City of Toronto.**

Please refer to the above Tender (RFT) document in your possession and be advised of the following:

**1. REVISIONS:**

**1.1 The Closing Deadline has been extended from Thursday May 9, 2019 at 12:00 PM (LOCAL TIME) to Tuesday, May 14, 2019 at 12:00 PM (LOCAL TIME).**

**1.2 Detail 6/L6 Rubber Playground Safety Surface (15' Fall Height)**

The rubber surface supplier specified for the 2,625mm radius circle designed for a 15' fall height (at base of the Alpha slide), shall be **Ure-Tech Surfaces Inc.** (Tel: 905.623.0600 • Fax: 905.248.3180). Product shall be 19mm (3/4") thick Playsoft TPV Poured-in-place rubber safety play surface system c/w cushion layer designed to meet specified fall height. Colour shall be Standard Blue RH20.

Please disregard any references to EVERPLAY Play and Recreation Surfaces on drawings or in specifications.

**2. RESPONSES TO QUESTIONS AND ANSWERS**

**Q1:** *As in the specifications for the colored concrete it was mentioned to contact CBM St Marys, but they don't have Beige Colour. Is there any alternative color for this? Please see the attachment.*

**A1:** **Integral Beige concrete for splash pad shall be 'Sandstone' from the CBM St. Marys Colours of distinction – Subtle Line (or approved equal). Refer to specification section 03300 Cast-in-Place Concrete and Detail 13/L9 Splash Pad Concrete Paving.**

**Q2:** *Can you please clarified for the decorative metal fence and stainless steel guardrail the finish. Is this a powder coat or just spray paint finish, and also for the stainless steel guardrail, does it have a red powder coat or just a spray paint. Why would you do a stainless steel guardrail if it is powder coated after?*

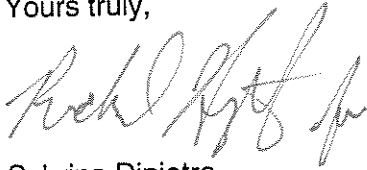
- A2:** All stainless-steel guardrails, handrails and handholds are to be powder-coated for maximum durability. Colour to be red. Refer to Detail 23/L10 and specification section 05525 Stainless Steel Guardrails/ Handrails.
- Q3:** Please clarify finishing for the Metal Fence as well
- A3:** All components of the decorative wrought iron fence and gates shall be treated with one coat sterling red primer, followed by two coats sterling semi-gloss black enamel, applied by electrostatic process. Refer to Detail 18/L9 Decorative Wrought Iron Fence/ Gates and specification section 05530 Wrought Iron Fence.
- Q4:** Provisional Items all on the proposed drawings, Please clarify which items in the main contract.
- A4:** Provisional items are clearly outlined and individually listed in the Pricing Form.
- Q5:** Maglin provisional benches just on the drawing, not on the written spec., please clarify which benches in the stipulated price of contract, which are provisional?
- A5:** Provisional items are clearly outlined and individually listed in the Pricing Form.
- Q6:** If possible, please provide an additional extension to the tender closing date.
- A6:** Tender closing date shall be extended from Thursday May 9, 2019 at 12:00pm noon (local time) to Tuesday May 14, 2019 @ 12:00pm Noon (local time).
- Q7:** I have got question from pre-qualified contractor - Our top wear is installed at a ¾" thickness we do not install our top at 2". We do not have testing to support that type of thickness with a 12' Fall Height. This must be clarified as we will not install our rubber with that thickness of top.
- A7:** Correction ~ PlaySoft TPV wearing course shall be 19mm (¾") thick NOT 50mm thick as shown on Detail 5/L6 Rubber Playground Safety Surface (STD Fall Height) and listed in specification section 02882 Rubberized Safety Surfacing (12' Fall Height).
- Q8:** For the Provisional shade structures (2) and metal screens (2), are the foundations for these structures to be included in the based bid or in the provisional cost for that item? Please confirm.
- A8:** The concrete foundations for the shade structures and metal screens are to be included in the provisional pricing.
- Q9:** If the foundations for the shade structures and metal screens are to be included in the provisional pricing section, what should be included in the base bid at these locations? The foundations are integrated in-line with the adjacent seat walls.
- A9:** Should the City opt to not to proceed with the installation of the shade structures and metal screens, the segments of seat wall will be pushed together into continuous walls. The overall length of seat walls will remain the same as shown on the plans (i.e. overall seat wall lengths will not be increased to include the lengths of the deleted concrete foundations). The areas created by the deletion of the concrete foundations shall be restored with soft landscaping, or in the case of the deletion of the playground shade structure, additional rubber playground surfacing.

The specifics of this restoration will be formally addressed after award of Contract and associated pricing will be addressed through change order.  
Please disregard any references to EVERPLAY Play and Recreation Surfaces on drawings or in specifications.

Should you have any questions regarding this addendum contact **Martin Suits** by email at [martin.suits@toronto.ca](mailto:martin.suits@toronto.ca).

Please attach this addendum to your Tender document and be governed accordingly. Proponents must acknowledge receipt of all addenda in their Proposal in the space provided on the Proposal Submission Form as per Section 1 – Item 10. Addenda of the Tender documents.

Yours truly,

A handwritten signature in black ink, appearing to read 'Sabrina Di Pietro', written over a light blue horizontal line.

Sabrina Di Pietro  
Manager, Construction Services  
Purchasing and Materials Management